

iSCAN211EXB Base station for Bluetooth handheld barcode scanner



- ATEX / IECEx Zones 1, 2, 21, and 22 certified
- RS232/422 or USB interface
- Connected to iSCAN211 handset via Bluetooth
- Charges the iSCAN211 as well as transferring data

This assembly requires a base station (iSCAN211EXB), a power supply (iSCANPS), a connection cable between the two (iSCAN2XXCAB5, 6, 7, 8, 9, or 10), and connections between the power supply and a PC (not supplied by Extronics).


External connection cable requirements:
Data cable

USB: 0.2 – 2.5 mm², 4-wire

RS232: 0.2 – 2.5 mm², 3-wire

Power supply cable

0.2 – 2.5 mm², 3-wire

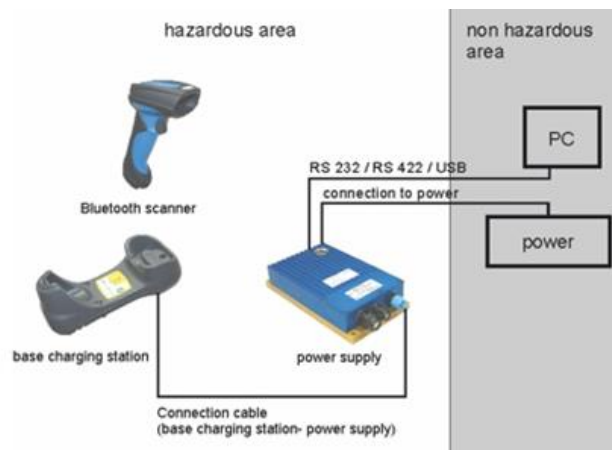

Specification

Certification	<ul style="list-style-type: none"> ⊕ II 2G Ex ib IIC T4, II 2G Ex ib IIC T4 Gb ⊕ II 2D Ex ib IIIC T135°C, II 2D Ex ib IIIC T135°C Db
Dimensions	105 x 80 x 140 mm
Weight	285g
Ingress protection	IP54
Bluetooth	V4.0, 2.402 ... 2.4830 GHz Wireless operating range up to 100 m (free view), batch function for expansion of the wireless radius, up to seven scanners communicate with one base station
Ambient operating temperature	-20°C to +50°C
Base station interface	RS232/RS422 or USB
Battery	Lithium-ion battery, 3.6V, 2250mAh
Operating voltage	4.9V, supplied via iSCANPS



Extronics Limited

1 Dalton Way, Midpoint 18, Middlewich, Cheshire, UK. CW10 0HU

Tel: +44 (0) 845 277 5000 Fax: +44 (0)845 277 4000 E-mail: info@extronics.com Web: www.extronics.com

416192-2.0